

## Lacquering of ALUCOBOND®


There are only used high quality lacquering systems, which possess an excellent weather resistance and which is unsensible concerning industrial emissions.

These properties are guaranteed by the use of UV-resistant bonding agents, whereas fluoropolymer lacquering systems (PVDF/FEVE) are used as a standard.


The superiority of the PVDF lacquering systems is shown in the following graphs.

The values indicated are taken from the test conducted by the American Coil Coating Association (NCCA) on lacquered surfaces which were exposed to the extreme climatic conditions of South Florida for several years.

1. Color change

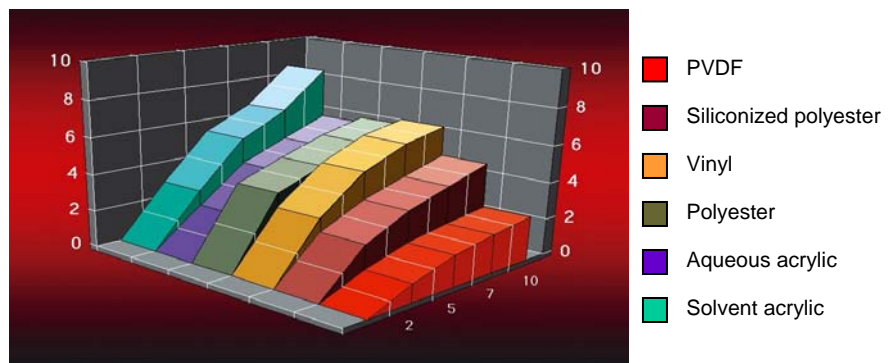

2. Gloss retention

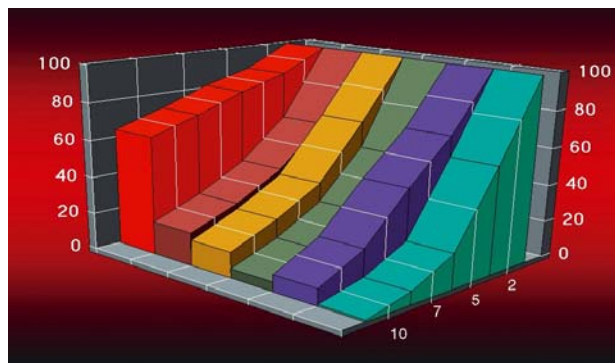

3. Chalking

